

# RQ-K2000 SERIES Integrated Rostrum



Microphone  
C/W Indicator



\*Reading Light  
(optional)



Easy Carry



High Power  
Loudspeaker

Everything you  
ever wanted in a **Rostrum**

Introducing the awesome new **EMIX** Rostrum. The Intergrated Rostrum is the most innovative, unique, functional and beautiful Rostrum in the market today. Crafted from the finest wood and laminated with PVC material. This awesome Integrated Rostrum come with a standard powerful sound system that will deliver your message with unparalleled clarity, and a rich elegant presentation.

The Rostrum penter polyster fabric with poly vinyl chloride (PVC) coating and it is 0.6 mm thick. It will help to protect your Rostrum from scratches as well as help resist against liquip spills.


## Features

- > Built-in 60 watts Amplifier come with 2 way system (10" speaker & 2" tweeter)
- > Tape or CD record output jack provided
- > Independent phantom power for condenser microphone
- > Wide frequency response with wide dispersion
- > Recessed brass reading lamp with on / off switch
- > External booster amplifier can be used

INTEGRATED ROSTRUM

# RQ-K2000 SERIES

## Integrated Rostrum

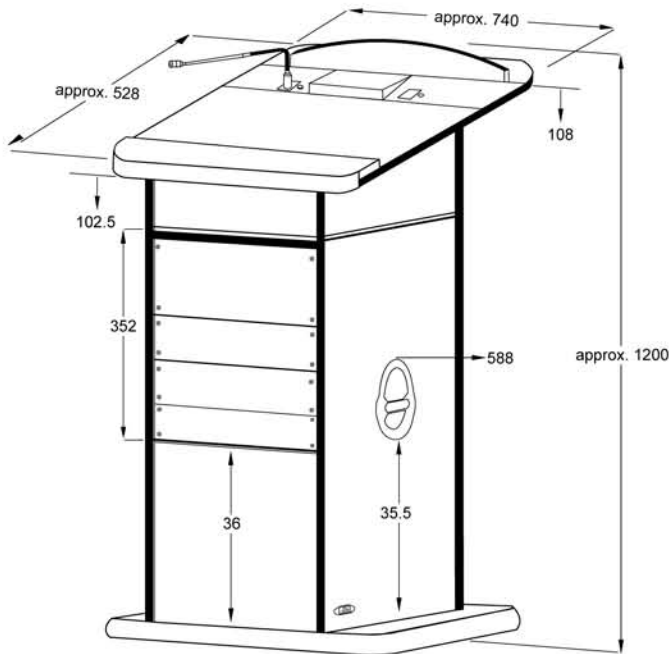

Rostrum Dimension



Cassette / CD / USB / AM/FM Tuner



CD / USB / AM/FM Tuner

| Model    | Version Description   |
|----------|---|
| RQ-K2006 | 60W Mixing Amplifier with Cassette / CD / USB / AM/FM Tuner |
| RQ-K2008 | 60W Mixing Amplifier with CD / USB / AM/FM Tuner            |

| Model  | RQ-K Series            |
|--|------------------------|
| Rated Power                                      | 30W                    |
| Max Power  | 60W                    |
| Speaker Size                                     | 10"                    |
| Rated Impedance                                  | 8Ω                     |
| Some Pressure Level at Rated Power (at 1KHz, 1m) | 11W<br>98dB            |
| Frequency Response                               | 60Hz - 20KHz           |
| Opening Angle                                    | 90° x 40°              |
| Tone Control                                     |                        |
| Bass   | ±10dB 100Hz            |
| Treble   | ±10dB 10KHz            |
| Control  |                        |
| Mic 1  | Priority, 48Vp power   |
| Mic 2  | With Volume Control    |
| Mic 3  | With Volume Control    |
| CD / Tuner / Cassette                            | With Volume Control    |
| Power Consumption                                | 4A (Max)               |
| Main Voltage                                     | 230 / 115 VAC, 50/60Hz |
| Color  | White / Rose Wood      |
| Dimensions (W x H x D)                           | 740 x 1100 x 528 mm    |
| Weight   | 55kg                   |

| FM / AM RADIO TUNER          |   |
|------------------------------|---|
| Tuning Range                 | 530kHz ~ 1720kHz (AM)<br>87.5 ~ 108mHz (FM) |
| Sensitivity                  | <10uV                                       |
| Frequency Response           | 100Hz ~ 12kHz                               |
| Total Harmonic Distortion    | <0.8% (1mV ; 40kHz)                         |
| Signal Noise Ratio           | >60dB                                       |
| Automatic Tuning Sensitivity | <50uV                                       |

| CASSETTE           |                |
|--------------------|----------------|
| Motor              | DC Serro Motor |
| Frequency Response | 60Hz - 13kHz   |
| Signal to Noise    | 58dB           |

| CD / MP3 / USB            |              |
|---------------------------|--------------|
| Audio Output Level        | 1.2V (±2dBu) |
| Frequency Response        | 40Hz - 70kHz |
| Total Harmonic Distortion | <0.1%        |
| Signal Noise Ratio        | >70dB        |
| Remote Control            | included     |